



### TRUE WDR

True Wide Dynamic Range ensures clear video even in installations with high-contrast areas




### IP67 RATED

Perfect for all outdoor installations, even in extreme weather



### SMART IR LEDs

Smart IR technology for clear pictures in total darkness



### PAINTABLE COVER

Optional snap-on cover is paintable to match the color of its surroundings



### H.264 SMART COMPRESSION

Smart Compression technology for increased storage retention



### EDGE STORAGE

MicroSD card slot for redundant storage directly on the camera

## CAMERA SPECIFICATIONS

IMAGE	
Image sensor	1/3", 4MP, Progressive Scan, CMOS
Shutter	Auto/Manual; 1 ~ 1/100000s
Lens	2.8mm Fixed
DORI Distance	<b>Detect:</b> 206'   <b>Observe:</b> 82'   <b>Recognize:</b> 41'   <b>Identify:</b> 20'
Max Resolution	2688x1520
Aspect Ratio	16:9
Field of View	104°
Day/Night	True Day / Night w/ IR-Cut Filter
Wide Dynamic Range (WDR)	True WDR @ 4MP; 120dB
IR	Smart IR; up to 98'

VIDEO CONTROL	
Video Streams	2
Compression	H.264 / H.265 / MJPEG
Max Frame rate	Primary Stream: 30FPS @ 2688x1520
Day/Night	Auto / Day / Night
White Balance	Auto / Manual / Scene
BLC	Yes
OSD	Up to 4 OSDs
ROI	Up to 2 areas
Motion Detection	Up to 4 areas
Privacy Masking	Up to 4 areas

AUDIO	
Audio In/Out	1 / 1
Compression	G.711A, G.711U
Two-way audio	Yes
Suppression	Yes

NETWORK	
Connector	RJ45
Network	10/100Mbps
ONVIF®	Profile S / G / T Compliant

HARDWARE	
Housing / Dome Cover	Metal / Polycarbonate
Ingress Protection	IP67
Impact Rating	IK10
Dimensions	Ø4.3" x 3.2" (Φ109 x 81mm)
Weight	0.99lb (0.45kg)
Alarm In / Relay Out	1 / 1
Pan / Tilt / Rotate	<b>Pan:</b> 3° ~ 360° <b>Tilt:</b> 0° ~ 68° <b>Rotate:</b> 3° ~ 360°
Country of Origin	China
NDAA Compliant	Yes

## CAMERA SPECIFICATIONS (CONTINUED)

POWER	
Power Consumption	Max 5.5W
Power Source	PoE (IEEE 802.3af) / DC 12V±25%

ENVIRONMENTAL	
Operating Environment	-31°F ~ 140°F (-35°C~60°C)
Humidity	≤95% RH (non-condensing)

STORAGE	
Onboard Storage	MicroSD card; Up to 512GB
Network	Supported




CERTIFICATIONS	
Safety	UL
EMC	FCC Part 15 Subpart B Class B

### ADDITIONAL IMAGES




A paintable dome cover is available free of charge by request  
 Part Number OE-CA00PDC-02

### DIMENSIONS

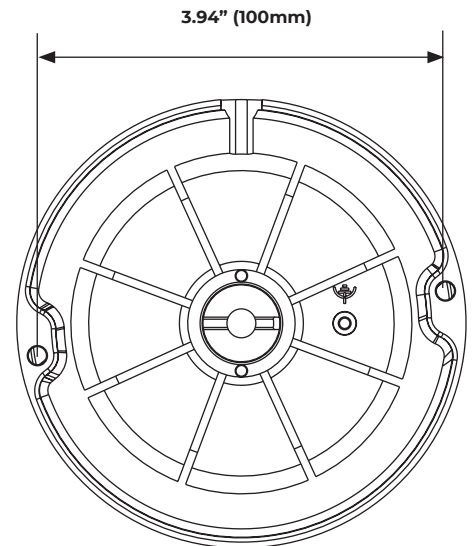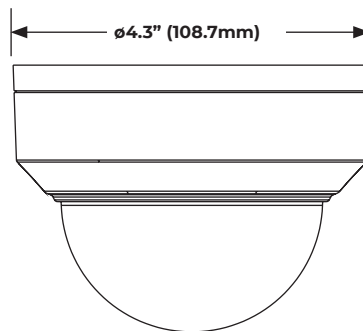

### CONNECTIONS

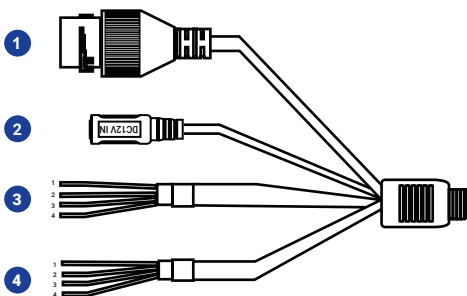

1	RJ-45	For network and PoE connections	
2	Power (12vDC)	Power connection	
3	Audio I/O	Gray	Audio Out
		Purple	Ground
		Green	Audio In
4	Alarm I/O	Brown	Ground
		Yellow	Alarm Out +
		White	Alarm Out -
		Orange	Alarm Input
		Blue	Ground


**ACCESSORIES**



10-Series Junction Box  
**OE-CA10AP-01**



10-Series Junction Box  
**OE-CA10JB-01**



10-Series Pendant Cap  
**OE-CA10PC-01**




10-Series Wall Mount  
**OE-CA10WM-01**



Paintable Dome Cover  
**OE-CA00PDC-02**




10-Series Wall Mount  
**OE-CA10WM-01**



Indoor/Outdoor 7" Junction Box  
**OE-CA00JB-01**




10-Series Wall Mount  
**OE-CA10WM-01**



Indoor/Outdoor 7" Junction Box  
**OE-CA00JB-01**




Pole Mount Kit  
**OE-CA00PMK-01**



10-Series Pendant Cap  
**OE-CA10PC-01**



Indoor/Outdoor Wall Mount  
**OE-CA00WM-01**




10-Series Pendant Cap  
**OE-CA10PC-01**



Indoor/Outdoor Wall Mount  
**OE-CA00WM-01**



Corner Mount  
**OE-CA00CM-01**




10-Series Pendant Cap  
**OE-CA10PC-01**



Indoor/Outdoor Wall Mount  
**OE-CA00WM-01**



Pole Mount Kit  
**OE-CA00PMK-02**



10-Series Pendant Cap  
**OE-CA10PC-01**



Ceiling-Mounted Pole  
**OE-CA00CMP-01**