



OE-C1018T4

4MP Outdoor IP Mini Turret Camera

The OE-C1018T4 mini turret is equipped with white light LEDs and built in audio to help avert incidents before they happen.



WHITE LIGHT LEDS

Deter potential threats with automatic white light activated by alerts.



BUILT-IN MICROPHONE

Capture clear audio with a built-in microphone, enabling complete situational awareness.



BUILT-IN SPEAKER

Remotely talk down or playback audio deterrent with a built-in speaker.



TRUE WDR

Quickly adapt to shifting light for consistent, high-quality imagery.



ADAPTIVE IR

Optimal illumination and clear images in low-light environments.



4MP

Experience clear imagery with 4MP resolution, boosting your video quality.



CAMERA SPECIFICATIONS

IMAGE

Image Sensor	1/3", 4MP, Progressive Scan, CMOS
Shutter	Auto/Manual, 1 ~ 1/100000s
Lens	2.8mm Fixed
Max Resolution	2688x1520
Aspect Ratio	16:9
Field of View	97°
Day/Night	True Day/Night with IR-Cut Filter
Wide Dynamic Range (WDR)	True WDR @ 4MP, 120dB

ILLUMINATION

IR Illumination	Built-in IR LEDs Up to 30 m (98 ft)
White Light Illumination	Built-in White LEDs Up to 30 m (98 ft)

VIDEO CONTROL

Configurable Video Profiles	Main Profile, High Profile
Compression	H.264 & MJPEG
Max Frame Rate	Primary Stream: 30FPS @ 2688x1520
Day/Night	Auto/Day/Night
White Balance	Auto/Manual/Scene
OSD	Up to 4 OSDs
ROI	Up to 8 Areas
Motion Detection	Up to 4 Areas
Privacy Masking	Up to 4 Areas
Image Rotation	Flip Vertical, Flip Horizontal, 180°, 90° Clockwise, 90° Counter-clockwise

AUDIO

Audio In/Out	Built-in Mic & Speaker
Compression	G.711A, G.711U
Suppression	Yes

HARDWARE

Housing/Dome Cover	Metal & Plastic
Dimensions	Ø4.6" x 3.8" (Ø118 x 96mm)
Weight	.71lbs (0.32kg)
Pan/Tilt/Rotate	Pan: 0° ~ 360° Tilt: 0° ~ 80° Rotate: 0° ~ 360°
Country of Origin	China

CERTIFICATIONS

Certifications	UL, cUL, FCC, NDAA, IP67
----------------	--------------------------



CAMERA SPECIFICATIONS (CONTINUED)

NETWORK

Connector	RJ45
Network	10/100Mbps
ONVIF®	Profile S/G/T Compliant

POWER

Power Consumption	Max 8W
Power Source	PoE (IEEE 802.3af), DC 12V±25%


ENVIRONMENTAL

Operating Temperature	-22°F ~ 140°F (-30°C ~ 60°C)
Humidity	95% RH (Non-condensing)

STORAGE

Onboard Storage	MicroSD Card, Up to 512GB
Network	Supported

DIMENSIONS

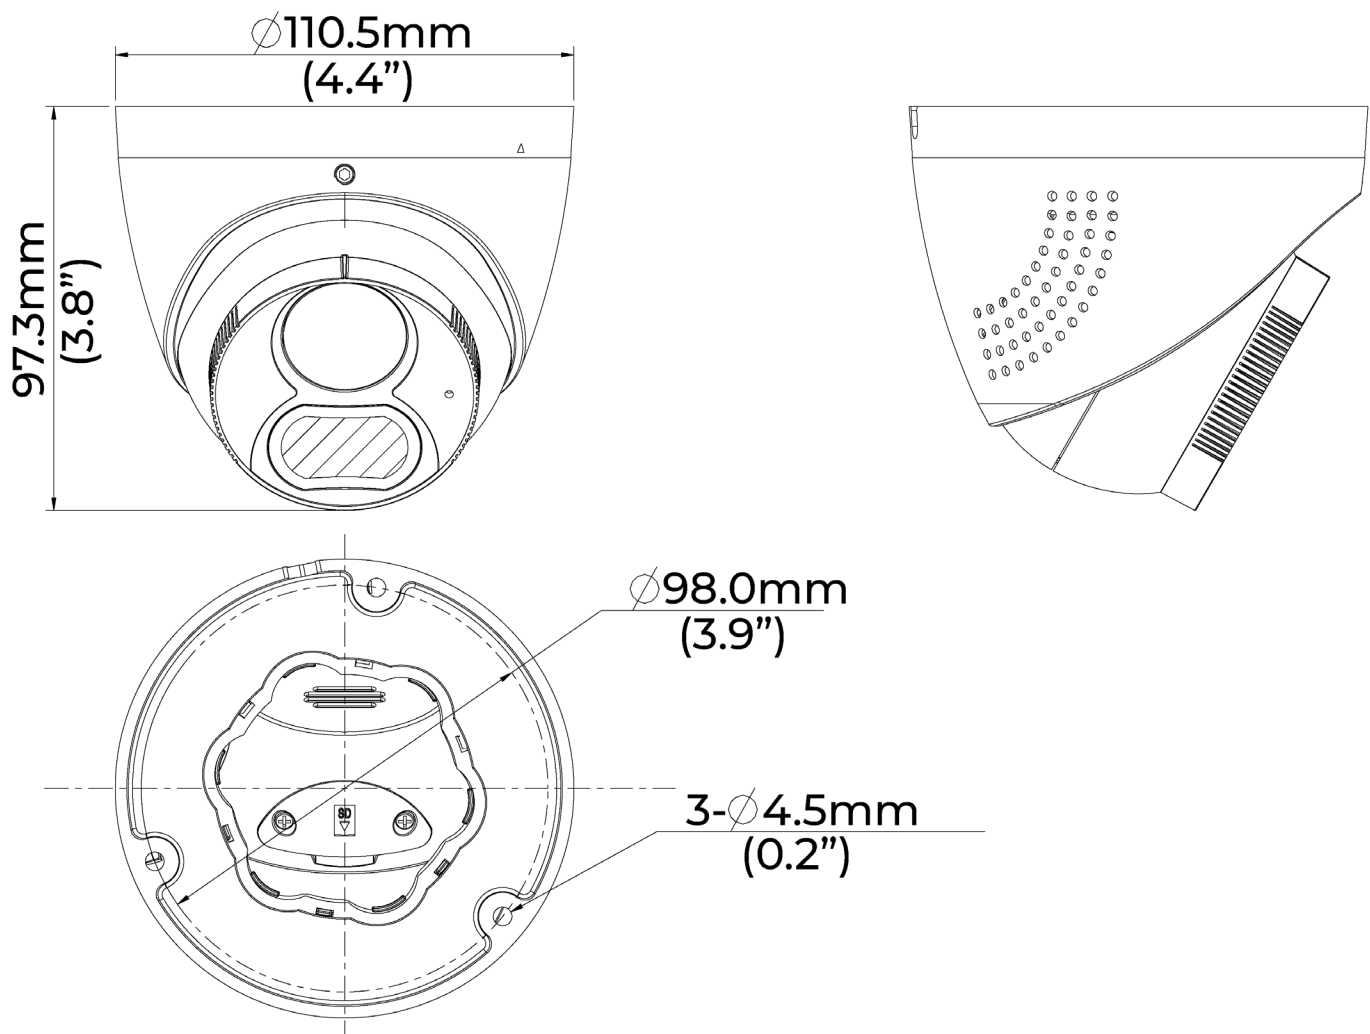




ACCESSORIES



10-Series Wall Mount
OE-CA10WM-01



10-Series Junction Box
OE-CA10JB-01



10-Series Pendant Cap
OE-CA10PC-01



Paintable Dome Cover
OE-CA00PDC-01



Paintable Dome Cover
OE-CA00PDC-02


Accessory Kits



10-Series Wall Mount Kit
with Outdoor Junction Box
OE-CA10WMKIT-01



10-Series Wall Mount
OE-CA10WM-01




Indoor/Outdoor 7" Junction Box
OE-CA00JB-01



10-Series Pole Mount Kit
with Outdoor Junction Box
OE-CA10PMKIT-01



10-Series Wall Mount
OE-CA10WM-01




Indoor/Outdoor 7" Junction Box
OE-CA00JB-01



Pole Mount Kit
OE-CA00PMK-01



10-Series Pole Mount Kit
with Pendant Cap
OE-CA10WMKIT-02




10-Series Pendant Cap
OE-CA10PC-01



Indoor/Outdoor Wall Mount
OE-CA00WM-01



10-Series Corner Mount Kit
with Pendant Cap
OE-CA10CMKIT-01



10-Series Pendant Cap
OE-CA10PC-01




Indoor/Outdoor Wall Mount
OE-CA00WM-01



Corner Mount
OE-CA00CM-01



10-Series Pole Mount Kit
with Pendant Cap
OE-CA10PMKIT-02



10-Series Pendant Cap
OE-CA10PC-01




Indoor/Outdoor Wall Mount
OE-CA00WM-01



Pole Mount Kit
OE-CA00PMK-02



10-Series Ceiling Mounted Pole Kit
with Pendant Cap
OE-CA10CPKIT-01



10-Series Pendant Cap
OE-CA10PC-01



Ceiling-Mounted Pole
OE-CA00CMP-01