

OE-C2214B4

## 4MP Outdoor Fixed IP Bullet Camera

The OE-C2214B4 is a rugged outdoor 4MP IP bullet camera, designed for low maintenance operation in high-traffic outdoor environments and challenging weather conditions.



### TRUE WDR

Quickly adapt to shifting light with wide dynamic range for consistent, high-quality imagery.



### 4MP

Experience clear imagery with 4MP resolution, boosting your video quality.



### ADAPTIVE IR

Optimize night vision with Adaptive IR, ensuring clear and detailed imagery in darkness.



### IP67 WATERPROOF RATING

Brave the elements with an IP67-rated housing, ideal for outdoors.



### BUILT-IN MICROPHONE

Capture clear audio with a built-in microphone, enabling complete situational awareness.



### NDA COMPLIANT

NDA compliance meets the latest federal security standards.



## CAMERA SPECIFICATIONS

### IMAGE

Image Sensor	1/2.9", 4MP, Progressive Scan, CMOS
Shutter	Auto/Manual, 1 ~ 1/100000s
Lens	2.8mm Fixed Lens
Max Resolution	2560x1440
Aspect Ratio	16:9
Field of View	101.5°
Day/Night	True Day/Night with IR-Cut Filter
Wide Dynamic Range (WDR)	True WDR @ 4MP, 120dB
IR	Adaptive IR   Up to 98°

### VIDEO CONTROL

Configurable Video Profiles	Main Profile, High Profile
Compression	H.264 & MJPEG
Max Frame Rate	Primary Stream: 30FPS @ 2560x1440
Day/Night	Auto/Day/Night
White Balance	Auto/Manual/Scene
OSD	Up to 4 OSDs
ROI	Up to 8 Areas
Motion Detection	Up to 4 Areas
Privacy Masking	Up to 4 Areas
Image Rotation	Flip Vertical, Flip Horizontal, 180°, 90° Clockwise, 90° Counter-clockwise

### AUDIO

Audio In/Out	Built-in Mic
Compression	G.711A, G.711U
Suppression	Yes

### NETWORK

Connector	RJ45
Network	10/100Mbps
ONVIF®	Profile S/G/T Compliant

### HARDWARE

Housing/Dome Cover	Graphene & Metal
Ingress Protection	IP67
Dimensions	6.5" x 2.5" x 2.5" (166 x 62 x 62mm)
Weight	.86lbs (0.39kg)
Pan/Tilt/Rotate	Pan: 0° ~ 360° Tilt: 0° ~ 90° Rotate: 0° ~ 360°
Country of Origin	China
NDAA Compliant	Yes



## CAMERA SPECIFICATIONS (CONTINUED)

### POWER

Power Consumption	Max 5.5W
Power Source	PoE (IEEE 802.3af), DC 12V±25%

### ENVIRONMENTAL

Operating Temperature	-22°F ~ 140°F (-30°C ~ 60°C)
Humidity	95% RH (Non-condensing)


### STORAGE

Onboard Storage	MicroSD Card, Up to 512GB
Network	Supported

### CERTIFICATIONS

Certifications	UL, cUL, FCC
----------------	--------------

## DIMENSIONS

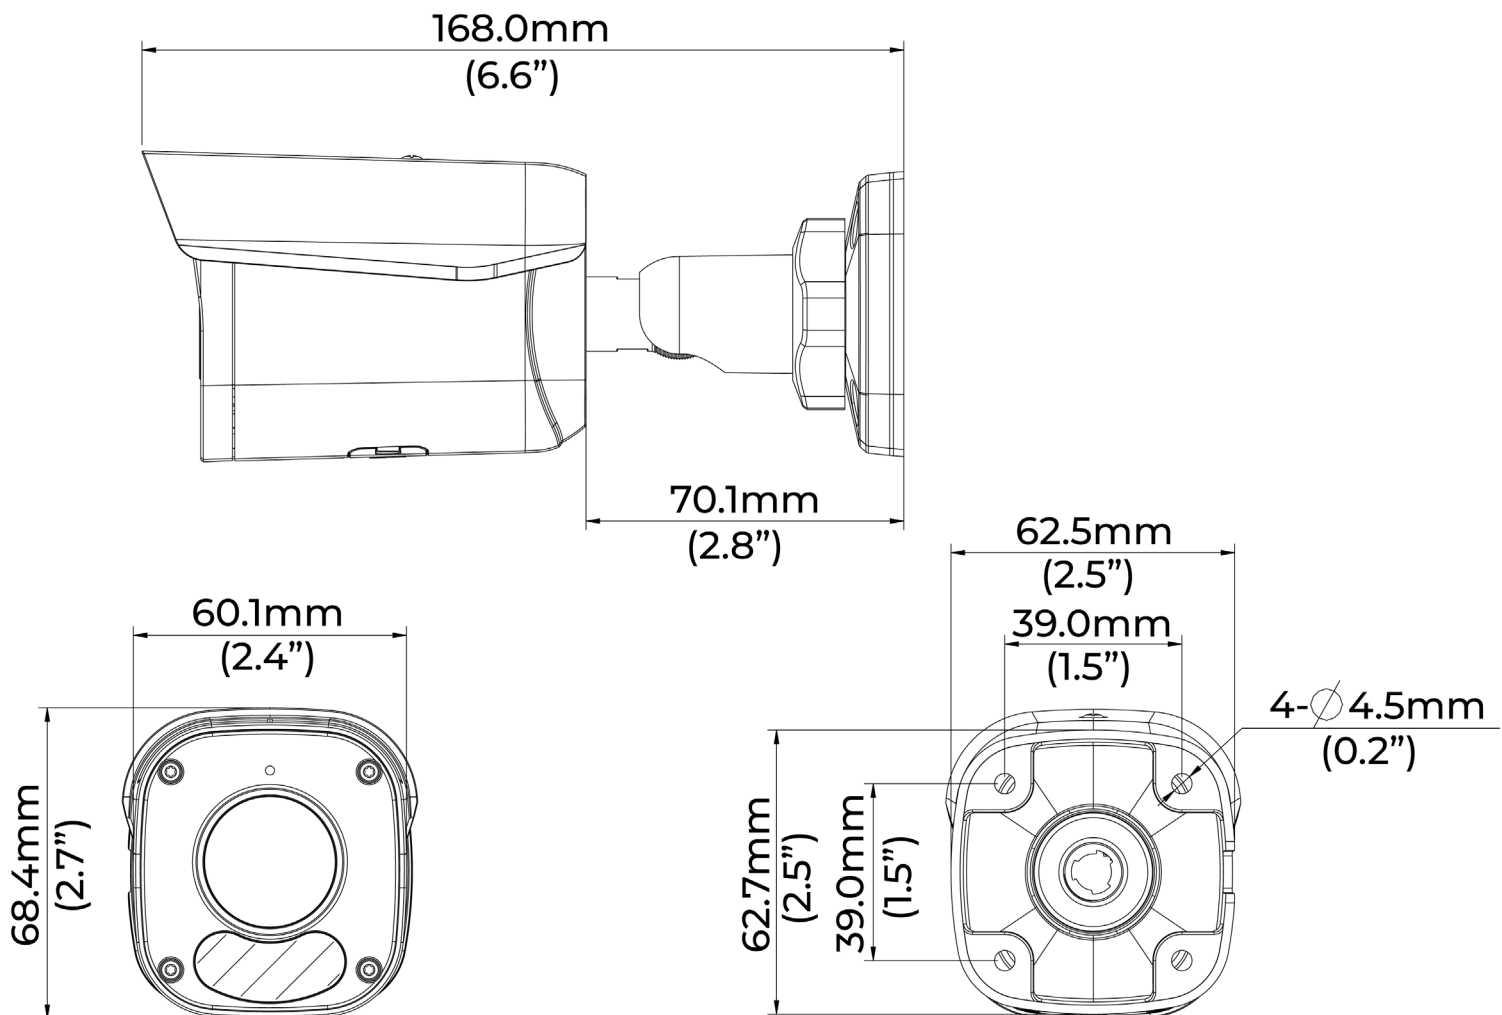



## ACCESSORIES



Indoor/Outdoor 7" Junction Box  
**OE-CA00JB-01**

