




TRUE WDR

True Wide Dynamic Range ensures clear video even in installations with high-contrast areas



ALARM I/O

Alarm connections wire the camera directly to alarm devices



ADAPTIVE IR LEDs

Adaptive IR technology for clear pictures in total darkness



TRUE DAY / NIGHT

True Day / Night provides superior video in a variety of lighting



TWO-WAY AUDIO

Receive and transmit audio through the camera



NDAA COMPLIANT

NDAA compliance meets the latest federal security standards

CAMERA SPECIFICATIONS

IMAGE	
Image sensor	1/1.7" Sony Progressive CMOS
Shutter	Auto/Manual; 1 ~ 1/100000s
Lens	1.65mm Fixed
Max Resolution	Software Dewarping: 4000x3000 Edge Dewarping: 2976x2976
Aspect Ratio	16:9
Field of View	180°
Day/Night	True Day / Night w/ IR-Cut Filter
Wide Dynamic Range (WDR)	True WDR @ 12MP; 120db
IR	Up to 16'

VIDEO CONTROL	
Video Streams	4
Compression	H.264 / H.265 / MJPEG
Max Frame rate	12MP @ 20FPS
Day/Night	Auto / Manual / Light Sensor
White Balance	Auto / Manual / Smart
ROI	Up to 3 areas
Motion Detection	Up to 4 areas
Privacy Masking	Up to 5 areas

AUDIO	
Audio In/Out	1 - Line In, 1 - Line Out
Compression	uLAW, AAC
Two-way Audio	Yes


NETWORK	
Connector	RJ45
Network	10/100/1000 Mbps
ONVIF®	Profile S / G / Q / T Compliant

HARDWARE	
Housing / Dome Cover	Metal / Polycarbonate
Ingress Protection	IP66
Impact Rating	IK10
Dimensions	Ø5.1" x 2.3" (Ø130 x 58mm)
Weight	1.2lb (0.565kg)
Alarm In / Relay Out	1 / 1
Country of Origin	Taiwan
NDAA Compliant	Yes


CAMERA SPECIFICATIONS (CONTINUED)

POWER	
Power Consumption	PoE: Max 12.95W 12vDC: Max 11.16W
Power Source	PoE (IEEE 802.3af) / DC 12V±25%
ENVIRONMENTAL	
Operating Environment	-22°F ~ 131°F (-30°C ~ 55°C)
Humidity	≤90% RH (non-condensing)
STORAGE	
Onboard Storage	Up to 512GB MicroSD card
Network	FTP, NAS
CERTIFICATIONS	
Safety	UL / CE / RCM
EMC	FCC Class A

DIMENSIONS

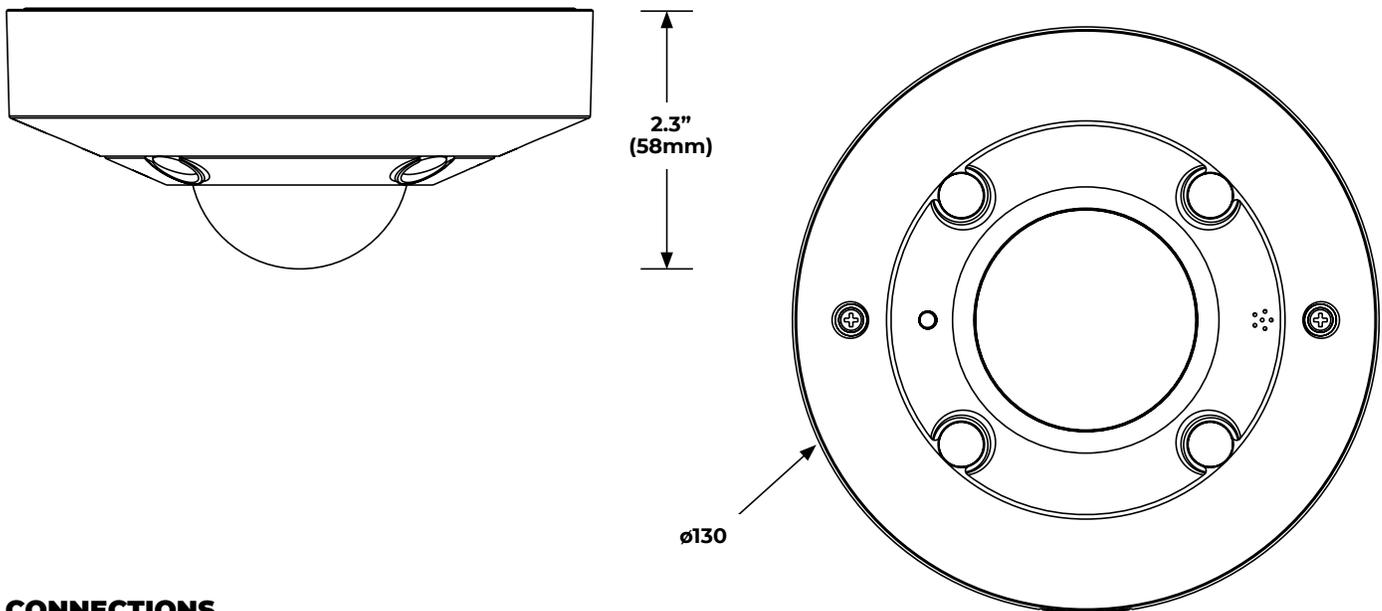

CONNECTIONS

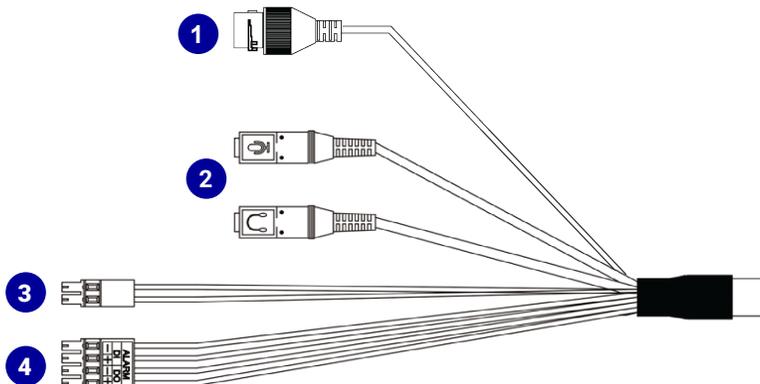

1	RJ-45	For network and PoE connections	
2	Audio I/O	Pink	Audio In (Line In)
		Green	Audio Out (Line Out)
3	Power (12vDC)*	Black	DC 12V -
		Red	DC 12V +
4	Alarm I/O	1	Alarm In -
		2	Alarm In +
		3	Alarm Out -
		4	Alarm Out +

*12vDC power input port should be plugged when not in use.

ACCESSORIES



91-Series Angled Wall Mount
OE-CA91AWM-01



91-Series Adapter Plate
OE-CA91AP-01

Accessory Kits

<p>91-Series Wall Mount Kit OE-CA91WMKT-01</p>	  <p>91-Series Adapter Plate OE-CA91AP-01</p> <p>Wall Mount OE-CA32WM-01</p>
<p>91-Series Junction Box Kit OE-CA91JBKT-01</p>	  <p>91-Series Adapter Plate OE-CA91AP-01</p> <p>Dome Junction Box OE-CA32JB-01</p>
<p>91-Series Pendant Mount Kit OE-CA91PCKT-01</p>	  <p>91-Series Adapter Plate OE-CA91AP-01</p> <p>Pendant Mount Adapter OE-CA32PC-01</p>
<p>91-Series Wall Mount Kit with Outdoor Junction Box OE-CA91WMKIT-02</p>	  <p>91-Series Wall Mount Kit OE-CA91WMKT-01</p> <p>Indoor/Outdoor 7" Junction Box OE-CA00JB-01</p>
<p>91-Series Ceiling Mounted Pole Kit with Pendant Cap OE-CA91CPKIT-01</p>	  <p>91-Series Pendant Mount Kit OE-CA91PCKT-01</p> <p>Ceiling-Mounted Pole OE-CA00CMP-01</p>
<p>91-Series Wall Mount Kit with Pendant Cap OE-CA91WMKIT-03</p>	  <p>91-Series Pendant Mount Kit OE-CA91PCKT-01</p> <p>Indoor/Outdoor Wall Mount OE-CA00WM-01</p>
<p>91-Series Corner Mount Kit with Pendant Cap OE-CA91CMKIT-01</p>	   <p>91-Series Pendant Mount Kit OE-CA91PCKT-01</p> <p>Indoor/Outdoor Wall Mount OE-CA00WM-01</p> <p>Corner Mount OE-CA00CM-01</p>
<p>91-Series Pole Mount Kit with Pendant Cap OE-CA91PMKIT-01</p>	   <p>91-Series Pendant Mount Kit OE-CA91PCKT-01</p> <p>Indoor/Outdoor Wall Mount OE-CA00WM-01</p> <p>Pole Mount Kit OE-CA00PMK-02</p>