OpenEye®



OE-CC52B5

5MP Cloud IP Bullet Camera

The OE-CC52B5 is a 5MP outdoor bullet camera, managed in the cloud, with recording and analytics on the edge.

OWS AI CAPABLE
Get a more intelligent and aware solution with a dedicated analytics processor.

CLOUD CAMERA
Streamline surveillance with an all-in-one video solution, featuring onboard recording and advanced analytics processing.

AUTOMATIC UPDATES
Reduce the burden on IT with automatic software updates, delivering the latest features and cybersecurity patches.

HIGH DYNAMIC RANGE
Achieve crystal clear image clarity in diverse lighting with advanced HDR technology.

ONBOARD RECORDING
Record directly on the camera and access the video seamlessly from the cloud.

TWO-WAY AUDIO
Receive and transmit audio through the camera line in/out.

CAMERA SPECIFICATIONS

OPTICAL	
Image Sensor	1/2.7" Progressive CMOS
Effective Pixels	5MP (2592x1944)
Lens Type	Varifocal Motorized Zoom
Focal Length	2.7 ~ 13.5mm
Field of View	100° ~ 30°
Iris	P-Iris
Day/Night	Auto (ICR)
Dynamic Range	Digital Overlap High Dynamic Range
IR Cut Filter	Yes
IR Range	Up to 164'

VIDEO SETTINGS	
Compression	H.264
Configurable Video Profiles	Main Profile, High Profile
Frame Rate	Up to 30FPS
Image Rotation	0°, 90°, 270°, Image Flip, Image Mirror

AUDIO	
Compression	G.711
Two-way Audio	Supported
Suppression	Supported

CONNECTIONS	
Ethernet	RJ45, 10/100Mbps
Alarm	2 - DI, 2 - DO (Phoenix Connections)
Audio In/Off	1 - Line In, 1 - Line Out (Phoenix Connections)
Power Source	PoE 802.3af*/PoE+ 802.3at/12vDC
Onboard Storage	512GB, 1TB, 1.5TB MicroSD, SDXC


*internal heater will be disabled

GENERAL	
CPU	Ambarella CV22S66
OWS AI Capable	Smart Motion, Person, Vehicle, Intrusion, Loitering, and Line Crossing. Analytics dependent on license tier. See OWS Licensing for more information.
Ingress Protection	IP67
Impact Rating	IK10
Operating Temperature	**IR Off:** -22° ~ 140°F (-30° ~ 60°C) **IR On:** -40° ~ 122°F (-40° ~ 50°C)
Humidity	90% R.H.
Dimensions	4.6" x 4.6" x 11.6" (118 x 118 x 295mm)
Weight	3lbs (1.4kg)
Pan/Tilt/Rotate	Pan: 350° | Tilt: 90° | Rotate: 180°
Country of Origin	Taiwan
NDAA Compliant	Yes


POWER	
Max Power Consumption (IR On)	12vDC: 29.5W | PoE+ 802.3at: 25W

CERTIFICATIONS	
Certifications	UL, CE, UKCA, FCC Part 15 Subpart B Class A

DIMENSIONS

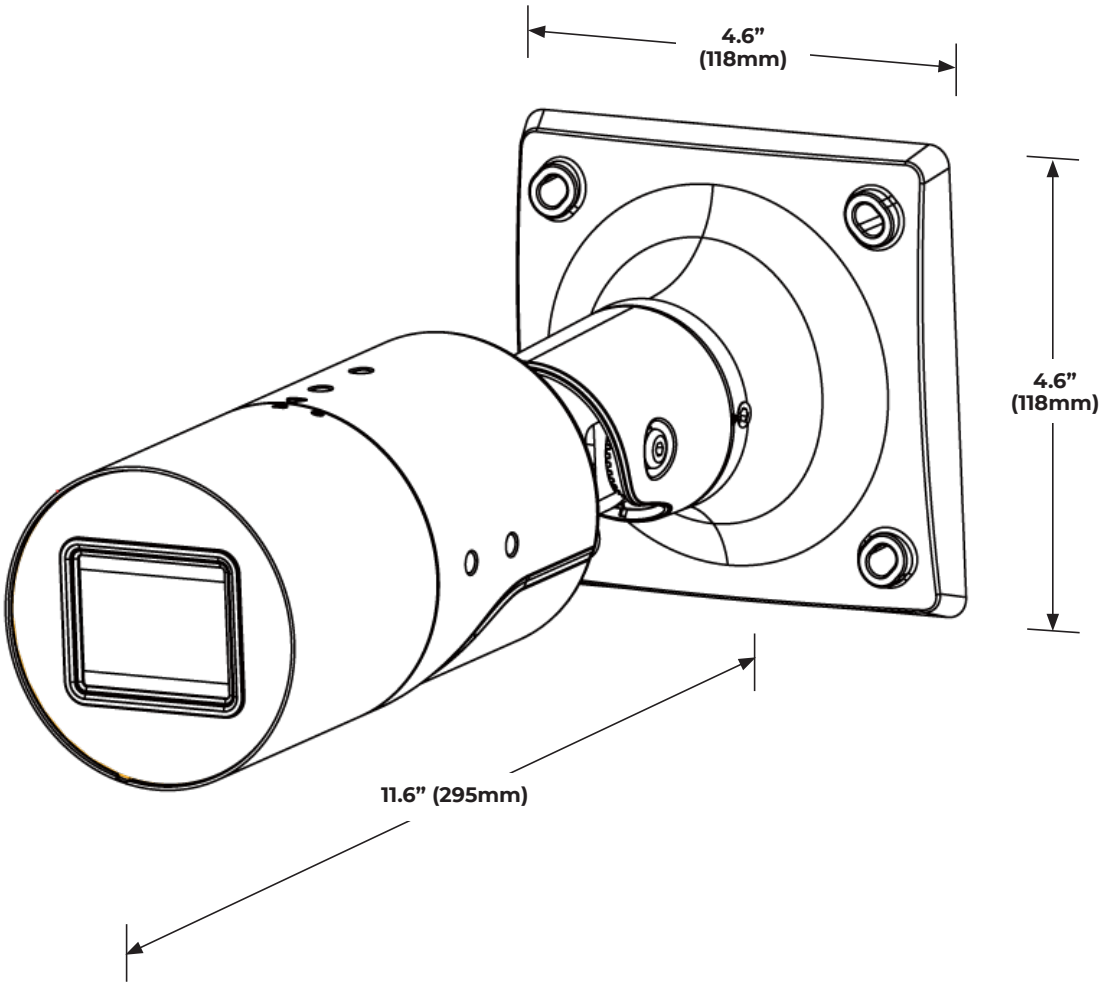

ACCESSORIES



Outdoor Junction Box
OE-CA00JB-02



Liberty Lake, WA, USA
509.232.5261
openeye.net
38058AC
OE-CC52B5

Copyright ©2025 OpenEye. All Rights Reserved.
Information contained in this document is subject to change without prior notice. OpenEye does its best to provide accurate information but cannot be held responsible for typos or mistakes.