



OE-CC52B5

5MP Cloud IP Bullet Camera

The OE-CC52B5 is a 5MP outdoor bullet camera, managed in the cloud, with recording and analytics on the edge.



OWS AI CAPABLE

Get a more intelligent and aware solution with a dedicated analytics processor.



CLOUD CAMERA

Streamline surveillance with an all-in-one video solution, featuring onboard recording and advanced analytics processing.



AUTOMATIC UPDATES

Reduce the burden on IT with automatic software updates, delivering the latest features and cybersecurity patches.



HIGH DYNAMIC RANGE

Achieve crystal clear image clarity in diverse lighting with advanced HDR technology.



ONBOARD RECORDING

Record directly on the camera and access the video seamlessly from the cloud.



CAMERA SPECIFICATIONS

OPTICAL

Image Sensor	1/2.7" Progressive CMOS
Effective Pixels	5MP (2592x1944)
Lens Type	Varifocal Motorized Zoom
Focal Length	2.7 ~ 13.5mm
Field of View	100° ~ 30°
Iris	P-Iris
Day/Night	Auto (ICR)
Dynamic Range	Digital Overlap High Dynamic Range
IR Cut Filter	Yes
IR Range	Up to 164'

VIDEO SETTINGS

Compression	H.264
Video Streams	2
Frame Rate	Up to 30FPS
Image Rotation	0°, 90°, 270°, Image Flip, Image Mirror

AUDIO

Compression	G.711
Two-way Audio	Supported
Suppression	Supported

CONNECTIONS

Ethernet	RJ45, 10/100Mbps
Alarm	DI x2, DO x2 (Phoenix Connections)
Audio	Line In x1/Line Out x1 (Phoenix Connections)
Power Source	PoE 802.3af*/PoE+ 802.3at/12vDC
Onboard Storage	512GB, 1TB, 1.5TB MicroSD, SDXC

*internal heater will be disabled

GENERAL

CPU	Ambarella CV22S66
OWS AI Capable	Smart Motion, Person, Vehicle, Intrusion, Loitering, and Line Crossing. Analytics dependent on license tier. See OWS Licensing for more information.
Ingress Protection	IP67
Impact Rating	IK10
Operating Temperature	IR Off: -22° ~ 140°F (-30° ~ 60°C) IR On: -40° ~ 122°F (-40° ~ 50°C)
Humidity	90% R.H.
Dimensions	Ø 4.6" x 4.6" x 11.6" (118 x 118 x 295mm)
Weight	3lbs (1.4kg)
Pan/Tilt/Rotate	Pan: 350° Tilt: 90° Rotate: 180°
Country of Origin	Taiwan
NDAA Compliant	Yes


POWER

Max Power Consumption (IR On)	Heater Off: 12vDC: 11W PoE 802.3af: 13W Heater On: 12vDC: 21W PoE+ 802.3at: 22W
-------------------------------	--


CERTIFICATIONS

Certifications	UL, CE, UKCA, FCC Part 15 Subpart B Class A
----------------	---

DIMENSIONS

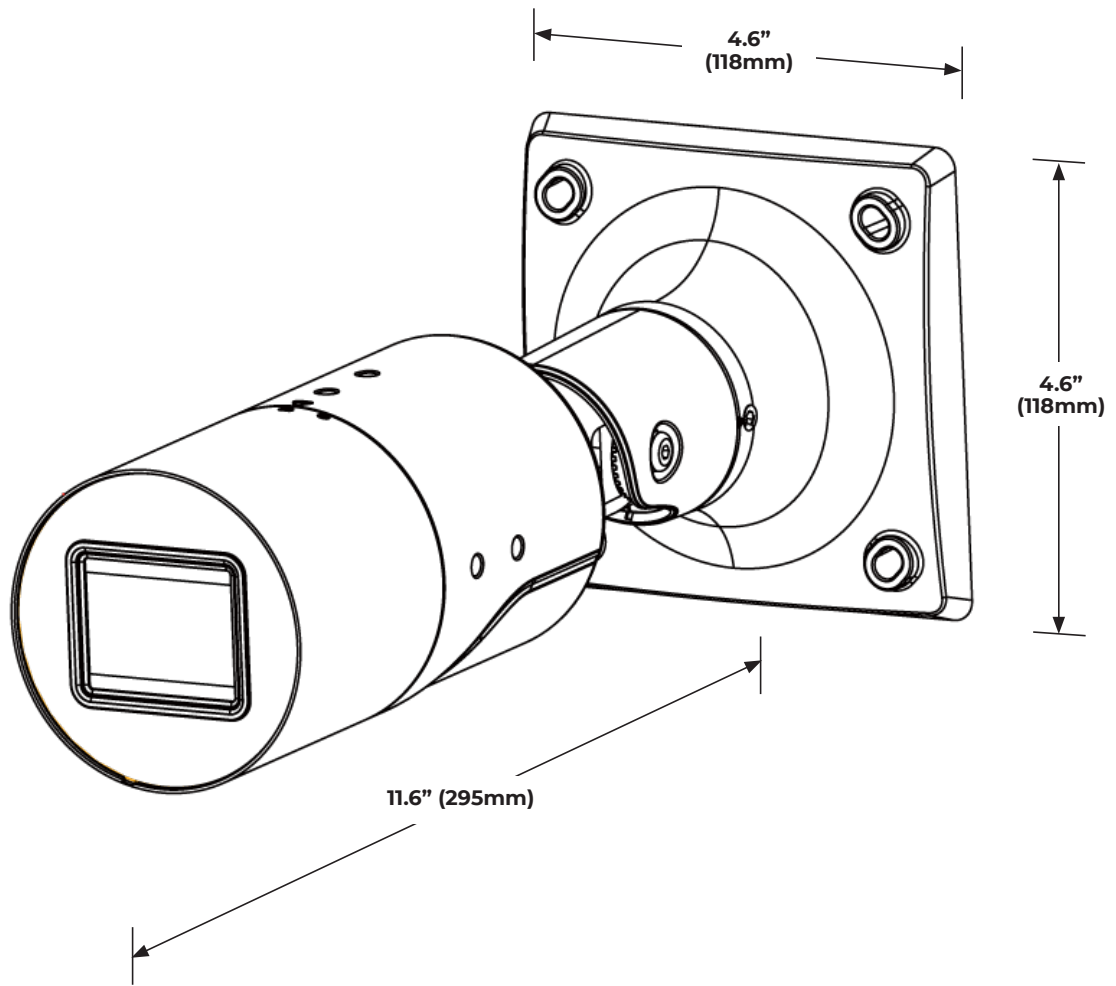

ACCESSORIES

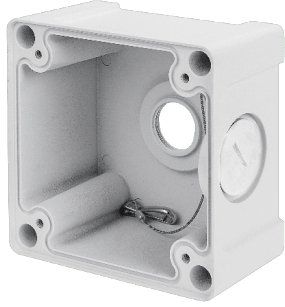

Outdoor Junction Box
OE-CA00JB-02

